

Thermo Top / Thermo 90

Heated cabin and pre-heated engine with Webasto water heaters.

A comfortable warm driver's compartment

Most motorhomes already possess a heating system for the interior. However these heating systems can rarely provide the driver's compartment with adequate heat due to heat loss suffered via the uninsulated large glass surface areas. The Webasto supplementary heater (based on a modified Thermo Top C) has the advantage of providing a dedicated heating system to the driver's compartment, by utilising the vehicle's own heating and ventilation system.

Functionality

The supplementary heater is mounted in the engine compartment and is integrated into the water circuit of the vehicle, in order to provide either dedicated heating to the driver's compartment or engine pre-heating. Changing from one circuit to another is done by a switch located on the fascia within the driver's compartment.

Application options of the Thermo Top C Motorcaravan:

- Installation kit adapted to Fiat Ducato, Mercedes-Benz Sprinter, Renault Master (for details please see the reverse of this page)
- Also suitable for installation in other vehicles (Peugeot Boxer, Citroën Jumper) with vehicle specific modifications of the hosing system
- Ready to install kits (including Thermo Top C Motorcaravan unit, heater brackets, Webasto digital timer with continuous heating operation function, wiring harness, switch, thermostat, connection to water circuit, fully comprehensive installation guidelines)



Webasto Thermo Top C Motorcaravan

Product specifications:

- Supply of warmth via the air outlets in the dash board
- Quiet-running operation
- Different power levels to suit individual needs
- Activation via GSM optional




Telestart T100 HTM



Digital timer

Installation Example:

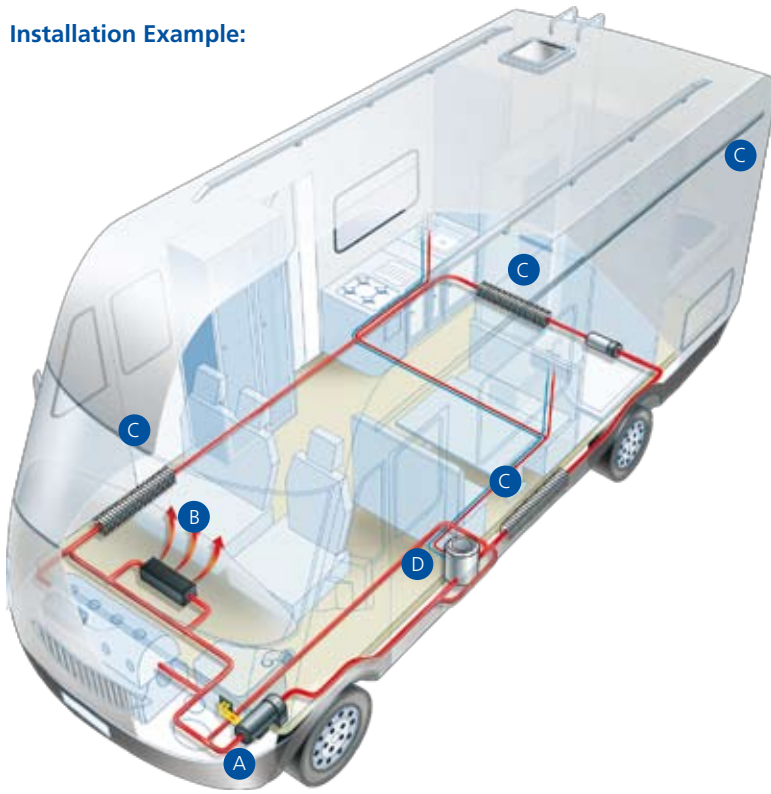

A Webasto Thermo Top heating system

B Heat exchanger

Radiator for heating up the cabin

C Air distribution

Heat exchangers with ventilation

D Domestic water boiler

The circuit of the heater can be connected with the hot water boiler of the vehicle



Thermo Top C Motorcaravan



Thermo 90 ST

Technical Specifications:

	Thermo Top C Motorcaravan	Thermo 90 ST
Heating power (kW)	2.5 - 5.2	1.8 - 7.6 (9.1)*
Fuel	Diesel	Diesel
Fuel consumption (l/h)	0.30 - 0.61	0.22 - 1.04 (1.27)*
Rated voltage (V)	12	12
Operating voltage range (V)	10.5 - 15	10 - 15
Rated power consumption (W)	18 - 42	37 - 83 (90)*
Dimensions L x W x H (mm)	214 x 106 x 168	355 x 133 x 232
Weight (kg)	2.9	4.8

*Boost mode